


# WMF 1100 S Utility Hook-Up Specifications

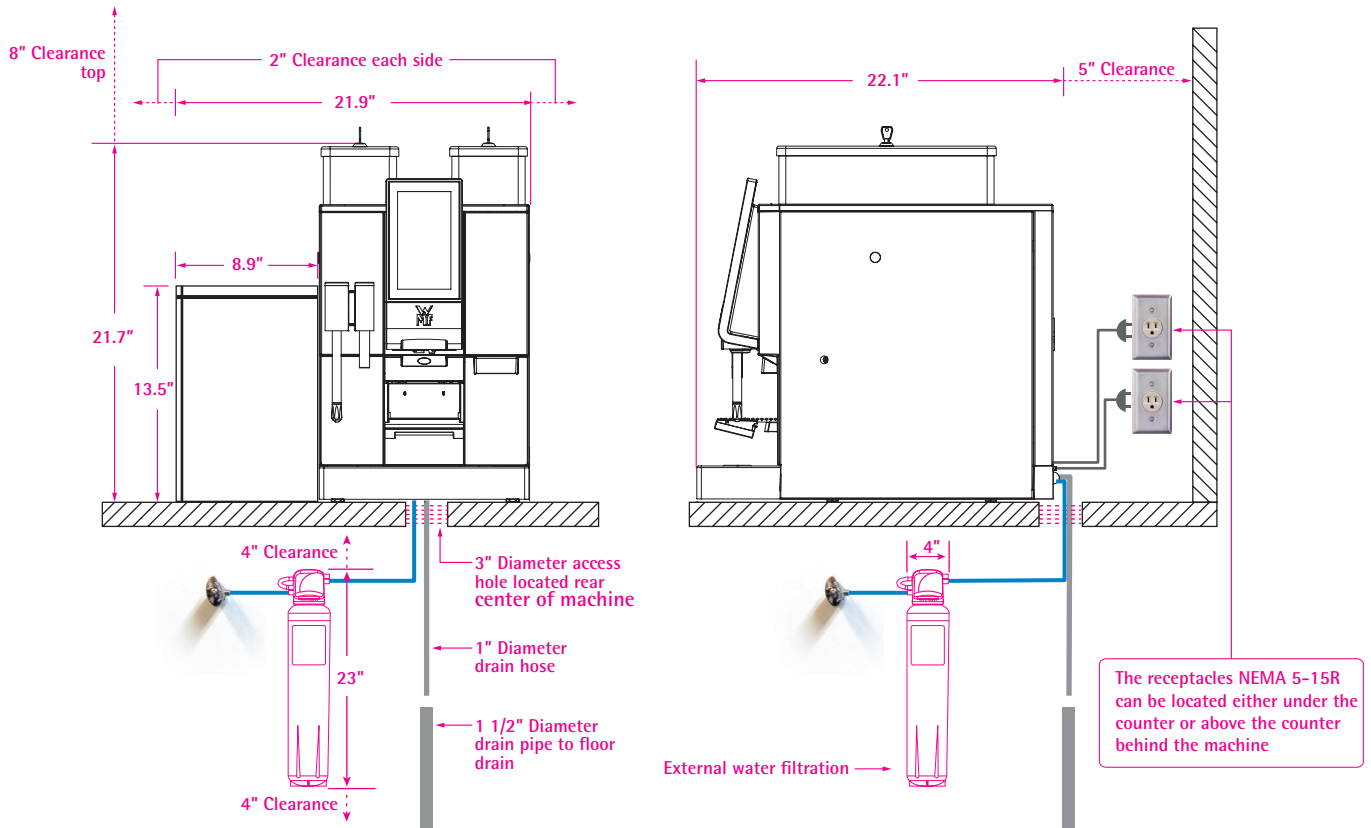


- Note:**
1. Side cooler is required for 1-step setup.
  2. The machine can use either external or internal water filtration.
  3. Drain setup applies only to models with fixed water connection.

## POWER, WATER SUPPLY, AND ACCESS REQUIREMENTS

**Note:** Access hole is only required if any of the utility hook-ups are located under the counter. Water shut-off valve and drain pipe only applies to fixed water connection and drain options.

	<ul style="list-style-type: none"> <li>Machine receptacle type: NEMA 5-15R</li> <li>Breaker panel: 15 Amp dedicated 120V single phase circuit</li> <li>Nominal Power ratings: 1.5kW</li> <li>Power supply: 120V, 60 hz</li> </ul>
	<ul style="list-style-type: none"> <li>Cooler receptacle type: NEMA 5-15R</li> </ul>
	<ul style="list-style-type: none"> <li>3" diameter access hole with collar (no sharp edges)</li> <li>Located centrally behind machine for water, drain hose and electrical</li> </ul>
	<ul style="list-style-type: none"> <li>Water shut-off valve with 3/8" compression fitting</li> <li>Back flow preventer in accordance with local requirements</li> <li>Water pressure requirement between 29-87 PSI (2-6 bar)</li> </ul>
	<ul style="list-style-type: none"> <li>Drain pipe to floor drain</li> <li>Copper or PVC in accordance with local health codes and regulations</li> <li>Diameter: 1 1/2" or larger</li> </ul>

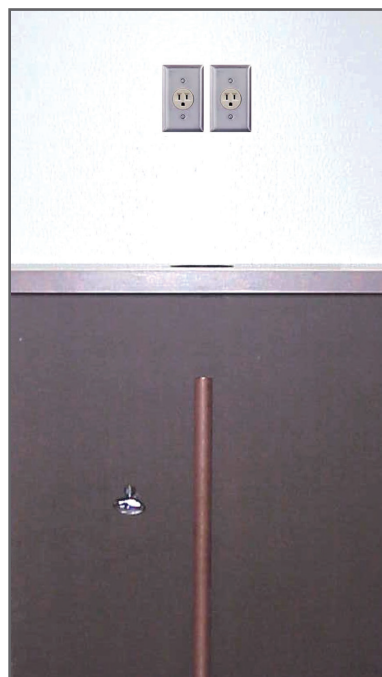

The receptacle, water shut-off valve and drain pipe must be within 3 feet (36") of the center of the location (footprint) of the machine.

Ideal under counter space for softener: 30" (minimum requirement: 28").