








WMF 5000S+

2 Step (Semi-Automatic) Utility Requirements

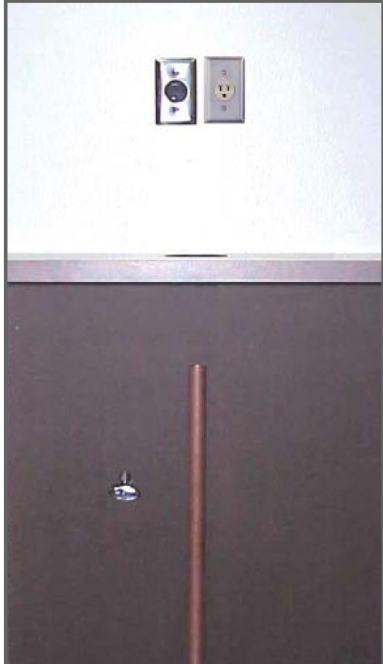

POWER, WATER SUPPLY, AND ACCESS REQUIREMENTS

	<ul style="list-style-type: none">Machine receptacle type: NEMA L6-30R3 Prong twist-lockBreaker panel: 30 Amp dedicated 220V single phase circuitActual maximum load: 24 Amps	 <p>The receptacle, water shut-off valve and drain pipe must be within 3 feet (36") of the center of the location (footprint) of the machine.</p> <p>Ideal under counter space for softener: 30" (minimum requirement: 28").</p>
	<ul style="list-style-type: none">3" diameter access hole with collar (no sharp edges)Located centrally behind machine for water, drain hose and electrical <p>Note: Access hole is only required if any of the utility hook-ups are located under the counter.</p>	
	<ul style="list-style-type: none">Water shut-off valve with 3/8" compression fittingBack flow preventer in accordance with local requirementsWater pressure requirement between 29-87 PSI (2-6 bar)	
	<ul style="list-style-type: none">Drain pipe to floor drainCopper or PVC in accordance with local health codes and regulationsDiameter: 1 1/2" or larger	